



iQ700, Induction cooktop, 60 cm, surface mount with frame EX675LYC1H

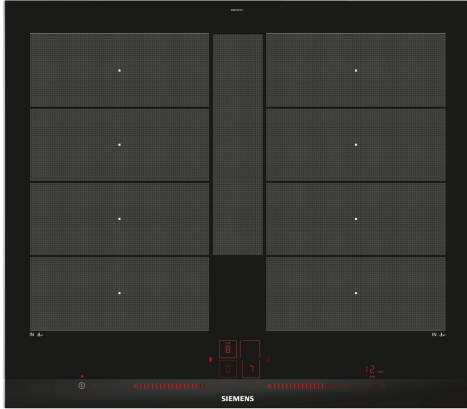

The modern flexInduction cooktop - for greater flexibility when cooking.

- ✓ flexInduction Plus – Smart, extendable cooking zone adapts to your cookware
- ✓ dual lightSlider – Just touch and slide to control your hob.
- ✓ fryingSensor Plus – No more burning or scorching your meals.
- ✓ powerMove Plus: enables intuitive control thanks to three heating zones with different temperatures – activated by touch.
- ✓ intelligent flexZones: Automatic cooking zone transfer for maximum flexibility.

Product name/family: Cooking zone ceramic
 Built-in / Free-standing: Built-in
 Source of energy: Electric
 Total number of positions that can be used at the same time: 4
 Required niche size for installation (HxWxD): 51 x 560-560 x 490-500 mm
 Width of the appliance: 602 mm
 Dimensions (HxWxD): 51x602x520 mm
 Dimensions of the packed product: 126x753x603 mm
 Net weight: 14.7 kg
 Gross weight: 16.6 kg
 Residual heat indicator: separate
 Location of control panel: Front
 Basic surface material: Ceramic
 Color of surface: Black, Alu, brushed
 Length electrical supply cord: 110 cm
 EAN code: 4242003963586
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



HZ9SE030	Set of 2 pots and 1 pan
HZ9TY010	Teppan Yaki
HZ390522	Griddle Plate
HZ394301	Connecting strip

iQ700, Induction cooktop, 60 cm, surface mount with frame EX675LYC1H

- 60 cm cooktop: space for 4 pots or pans

Flexibility of cooking zones

- 2 Flex zones + extended Flex zone: use cookware of any shape or size anywhere within the 40cm long zone or even place it laterally.
- Cooking zone front left: 190 mm, 225 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear left: 190 mm, 225 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear right: 190 mm, 225 mm, 2.2 KW (max power 3.7 KW)
- Cooking zone front right: 190 mm, 225 mm, 2.2 KW (max. power 3.7 KW)

Comfort & Convenience

- Dual LightSlider: directly control the power on the two illuminated touch bars (invisible when switched off).
- 17 power levels for each cooking zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Keep warm function: keep dishes warm at preset low power level.
- LED display and timer with auto switch off for all cooking zones: switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Count-down timer: an alarm sounds at the end of the time set (e.g. for pasta).
- Count-up timer: shows how much time has passed since starting the timer (e.g. for potatoes).

Time saving & efficiency

- powerBoost for all zones: boil water faster with up to 50% more power than at the highest standard level.
- Cooking zones will automatically join and separate based on the shape and size of the cookware placed.
- powerMove Plus: increase or decrease the power level simply by moving the pot forwards or backwards.
- flexMotion: when moving a pot to a different cooking zone, transfer all previous settings to the new zone at the touch of a button.
- Automatic zone selection: when switched on, the cooktop automatically selects the cooking zone on which a new cookware is placed.
- When moving a pot on the Flex zone, the settings adjust instantly and the cooking zone adapts to the size of the cookware
- quickStart: Quick and automatic first pot detection: when switching on, the cooktop automatically selects the cooking zone with cookware on it.
- reStart - Quickly reinstates previous settings: in case of unintentional switch-off, restore all previous settings by switching on the cooktop again within 4 seconds.

Cooking assistance

- FryingSensor with 5 temperature settings: prevents scorching with the automatic temperature regulation of the integrated sensor.

Design

- Black ceramic glass with stainless steel side profiles and beveled front

Safety

- 2-stage (h/H) digital residual heat indicator: indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the cooktop.
- wipeProtection function: wipe overboiled liquids without unintentionally changing settings (blocking all touch buttons for 30 seconds).
- Main switch: switch off all cooking zones at the touch of a button.
- Automatic safety switch-off: for safety reasons, heating stops after a preset time without interaction.
- Energy consumption display: shows the electricity consumption of the last cooking process.

Installation

- Dimensions of the product (HxWxD mm): 51 x 602 x 520
- Required niche size for installation (HxWxD mm) : 51 x 560 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 7.4 KW
- Power cord: 1.1 m, Cable included

iQ700, Induction cooktop, 60 cm,
surface mount with frame
EX675LYC1H

